
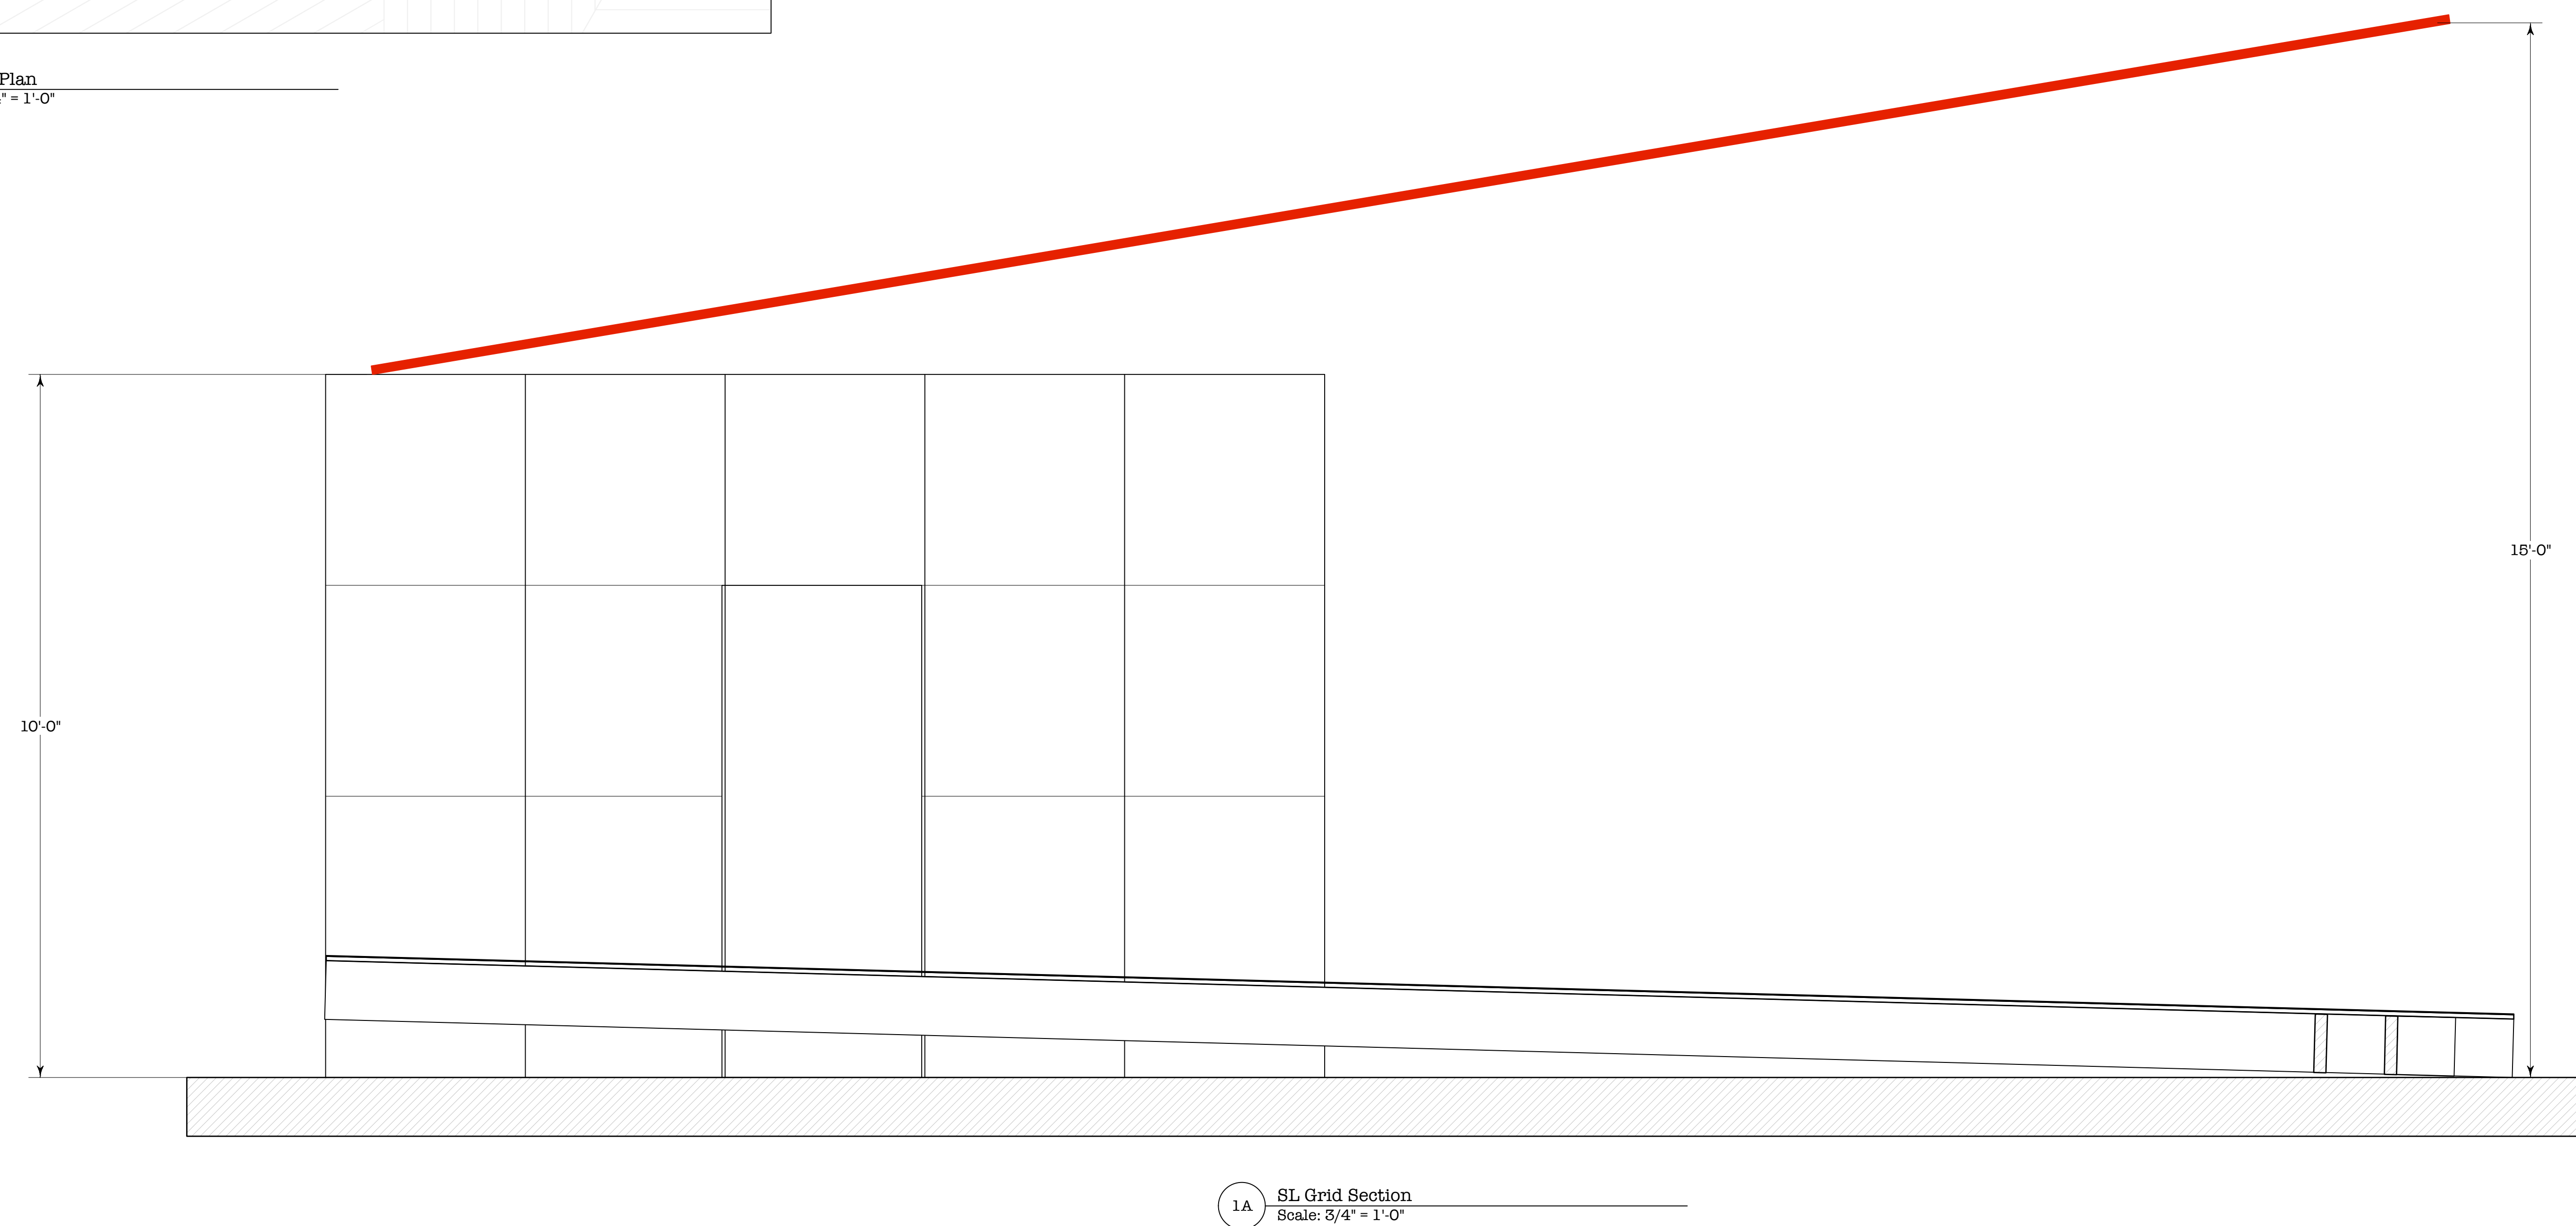


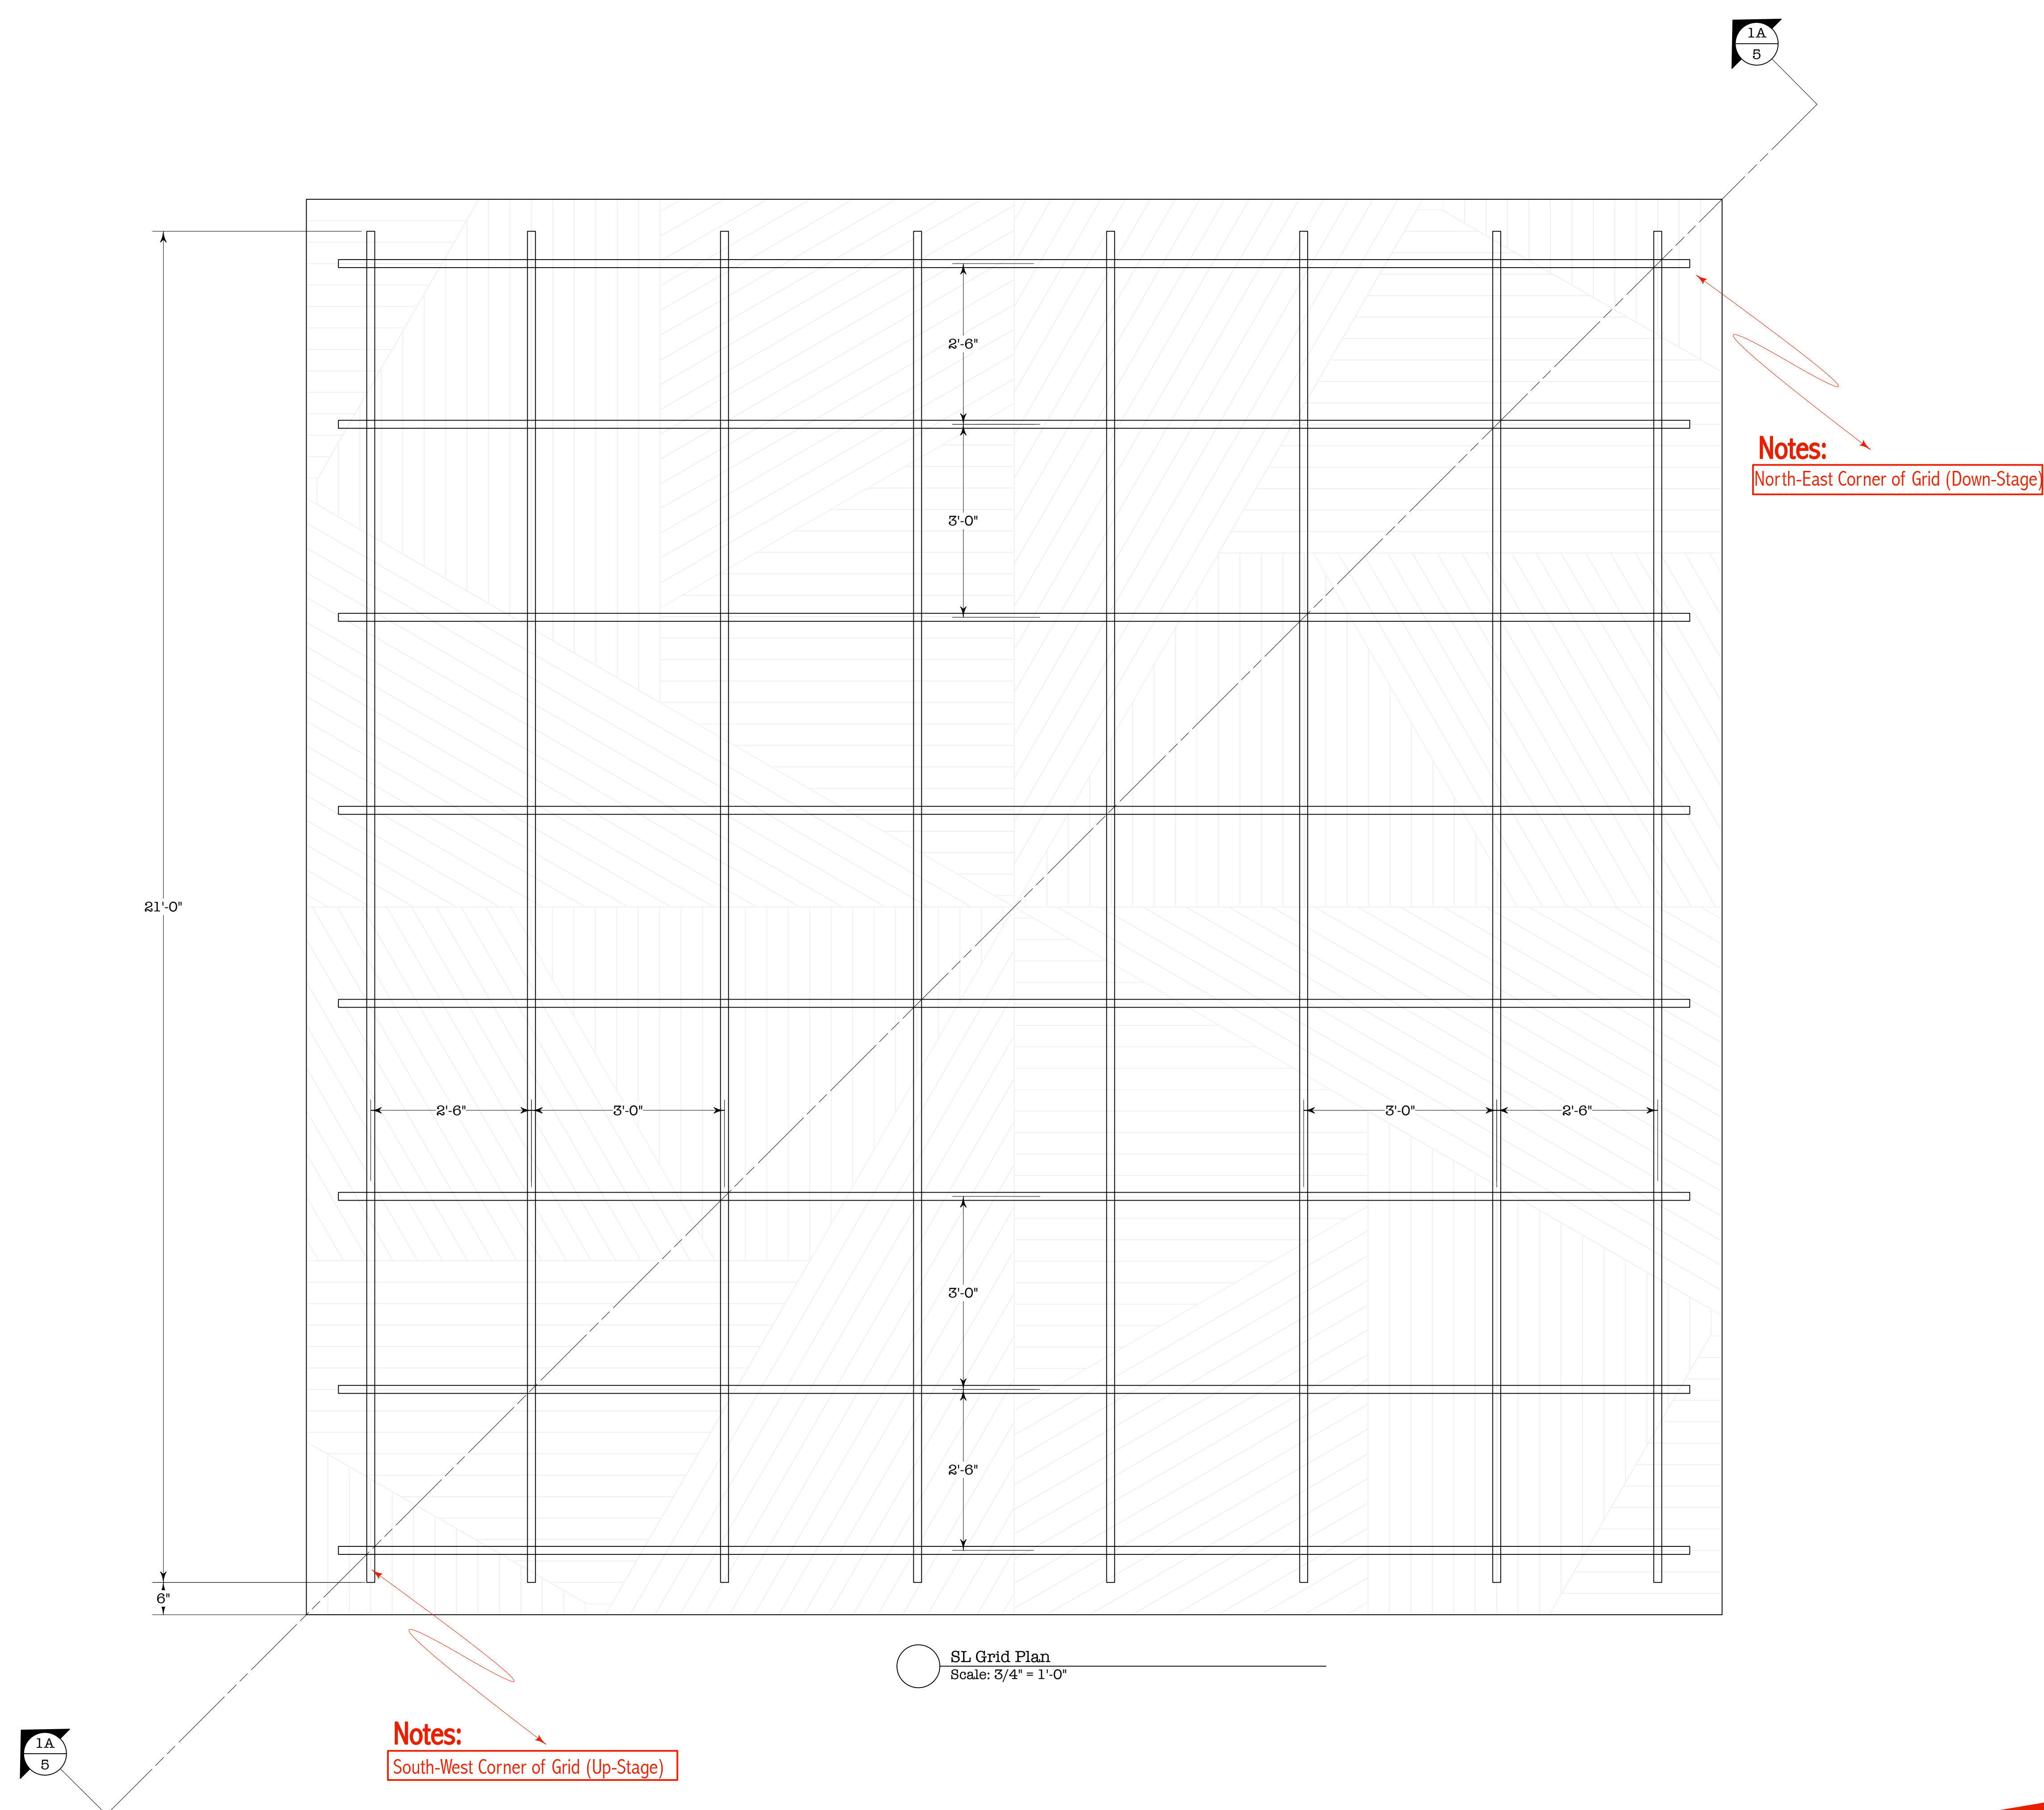

Notes:

- 2) This drawing requires artistic concepts and construction suggestions only. The designer and drafter are not required to determine the electrical, structural, or mechanical applications of the design and will not assume responsibility for proper engineering, construction or use. All materials and construction must meet the most stringent local safety and code of acceptance of the applicable jurisdiction. The design is not intended to be used as a basis for any legal action. The designer and drafter shall not be held liable for any claims, damages, or losses, including reasonable attorney fees, whatsoever which may be suffered by reason of the design furnished hereunder.
- 3) The section for the dock contains only the present design elements. Structural rigging elements to be determined in consultation with Designer and Technical Director.
- 4) The incline of the grid from up-stage to down-stage is 10° above stage floor to 15° above stage.
- 5) The up-stage corner of the grid is 0° North and 0° East and the South-West corner of the dock. The South-east corner of the grid should remain 0° North and 0° East of the Southern edge of the dock. The Western edge of the grid should remain 0° East to the Western edge of the dock.
- 6) If possible email, please contact the JCC at attentions@jcc10.com or production@jcc10.com